





CITY OF LODI

PUBLIC WORKS DEPARTMENT


Sign Post Installation

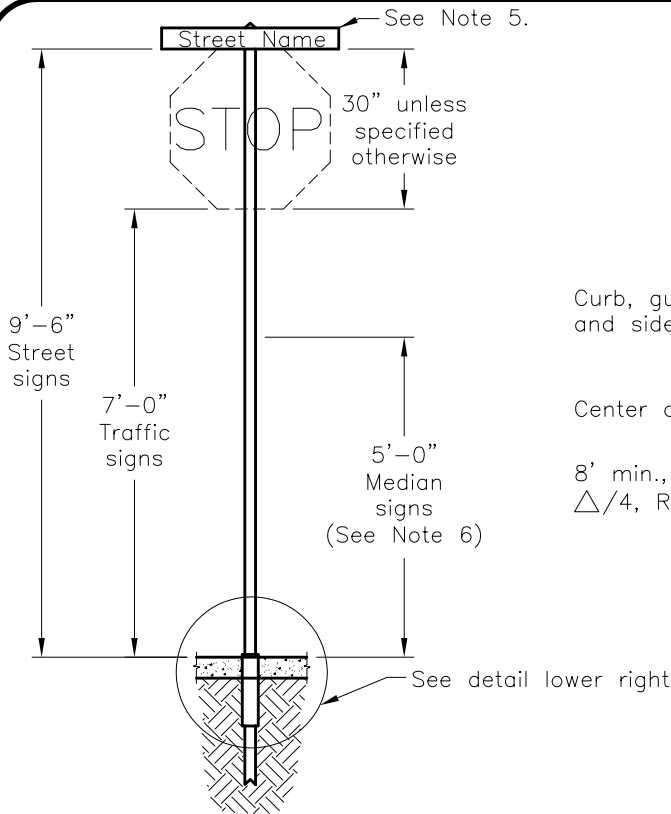


Sign Post

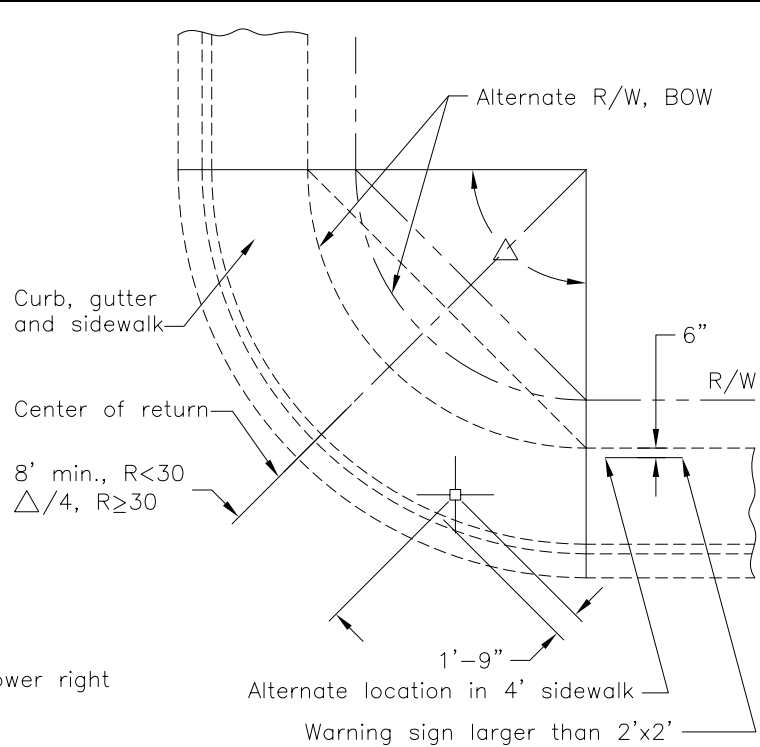

Sign Post Location

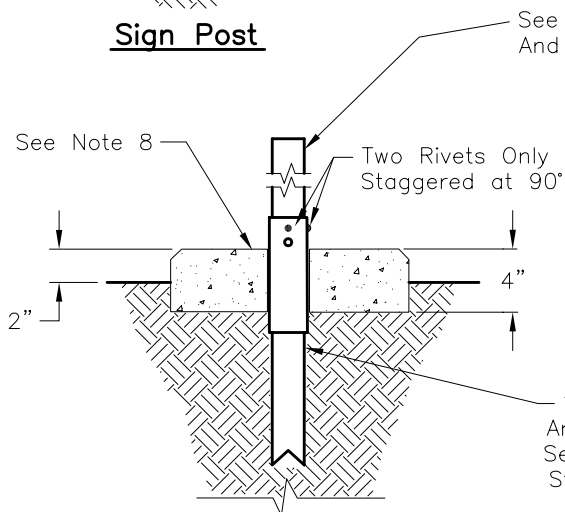

Dirt Location

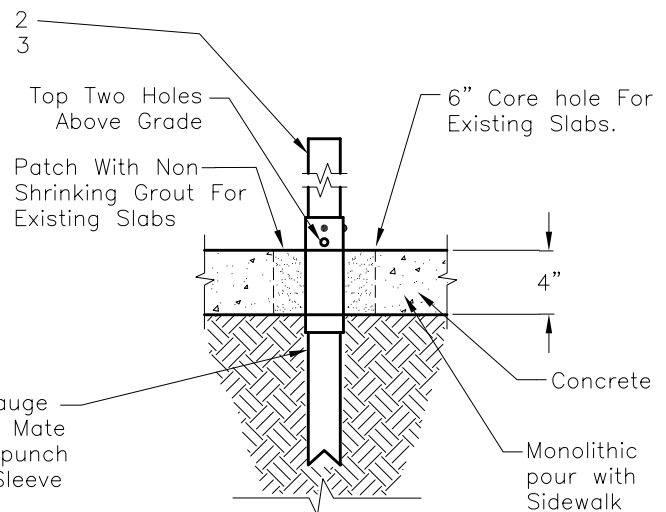

Sidewalk Location

Notes:

1. Concrete For Post Installation May Be Class C Concrete.
2. Posts Shall Be New 2"x2" 14 Gauge Galv. Tube Set Plumb.
3. When Sign Square Footage Is 7.5 Square Feet or More Post Shall Be 2" x 2" 12 Gauge Galv. Tube.
4. Posts Shall Be Select Punch Both Ends - Four Sides.
5. Street Name And Traffic Signs Per Std Plan 142.
6. R10's To Be Located 3.5' High When placed in the median.
7. A Powder Coat (Downtown Green) Is Required For Downtown Locations.
8. Form And Edge 12" x 12" Concrete Apron 4" Thick In Dirt Locations, When Required By Engineer.

Dr.	KT	No.	Date	Revision	Appr.
Ch.	WS	1	9/25	Changed 2"Ø Pipe to 2" Sq.	
Date	12/00				

Approved By: *F. Wally Sandelin*
F. Wally Sandelin
City Engineer
R.C.E. 39895
9/25/02
Date

STD PLAN

119